



Flat Panel TV Wall Mount Instruction Manual

TM1100

Kalliopi Karyda & CO, LP
87A, 17th November Str, P.C. 55535, Pylea, Greece.
Tel: +30 2310-944944 | Fax: +30 2310-944940

NOTE: We recommend that this product is installed by the professional only. we accept no liability for damages caused by incorrect assembly, installation or use. If there is any doubt, please contact the specialist from the seller for help.


IMPORTANT!

- For safety reasons, the wall or mounting surface must be capable of supporting the combined weight of the mount and the display; otherwise the structure must be reinforced.
- Safety gear and proper tools must be used. Failure to do so can result in property damage and/or serious injury.
- Make sure that no electrical cables, water pipes or gas pipes are located within the wall.

Tools required for the installation:

- Phillips Head Screw Driver
- Electric or Portable Drill
- 1/8" (3 mm) Drill Bit + Stud Finder (Drywall Installation)
- 5/16" (8 mm) Masonry Bit (Concrete Installation)

Also make sure that all of the hardware has been included with your mount. You should find the following:

(A) Drywall Screw X 2 

(B) Concrete Anchor X 2 

(C) M4x12 Bolt X 5 

(D) M4x30 Bolt X 4 


(E) Small Spacer X 4 

(F) M5x12 Bolt X 4 


(G) M5x30 Bolt X 4 

Installing the Wall Mount


Drywall Installation

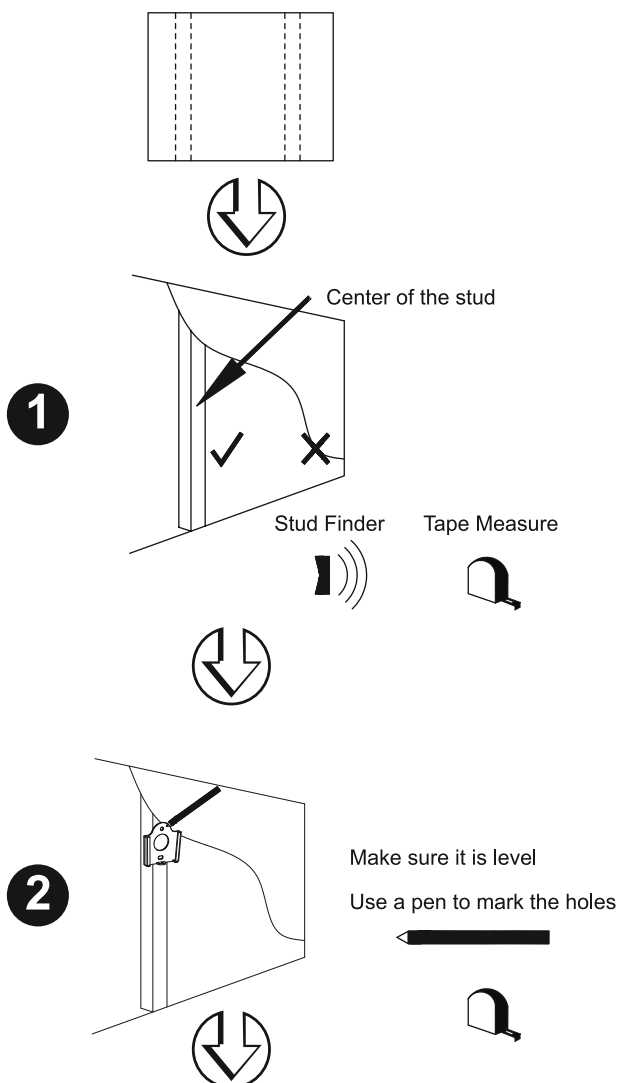


Concrete/Brick Installation

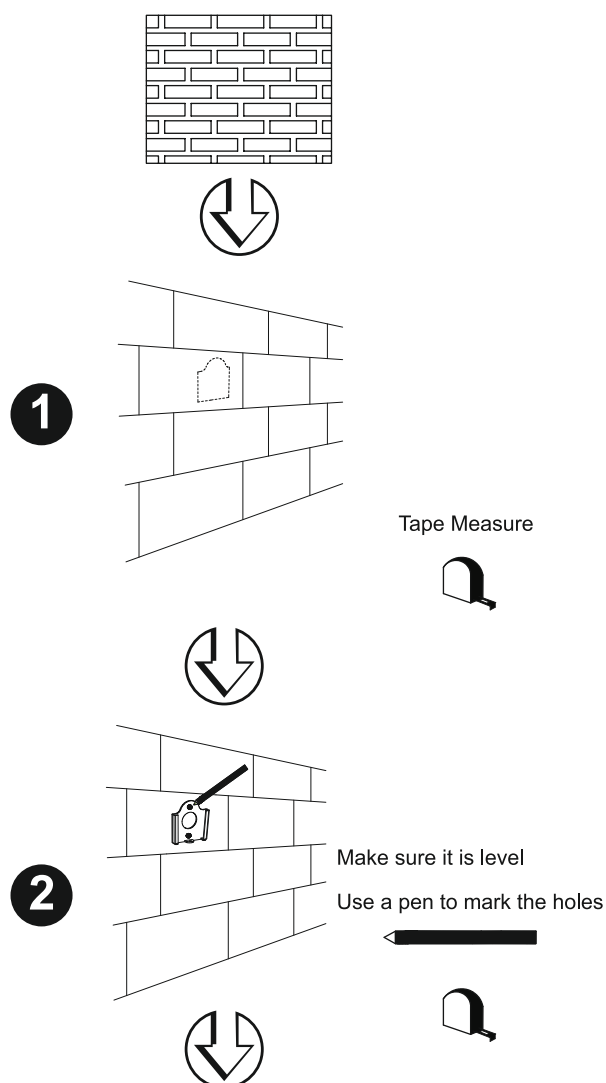


3

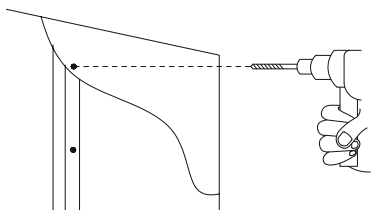

4

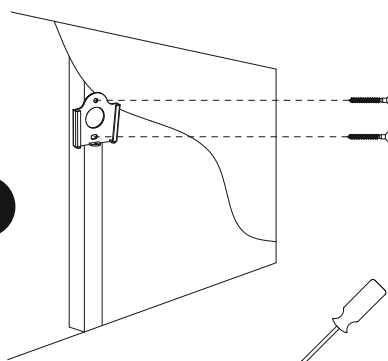


3

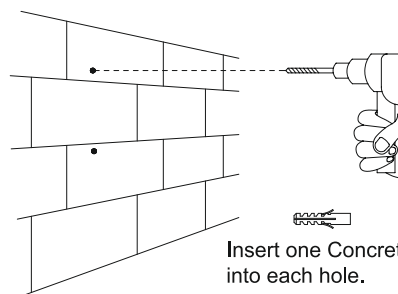

Insert one Concrete Anchor (B) into each hole.




4

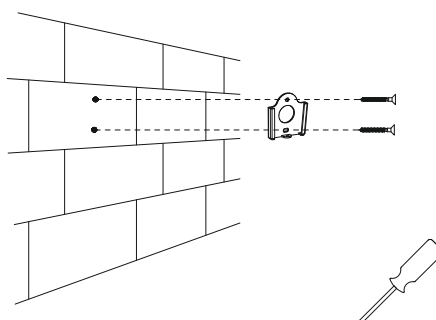

Please choose the bolts which fit your TV set

M4 or M5x12 Bolts (C or F)

5

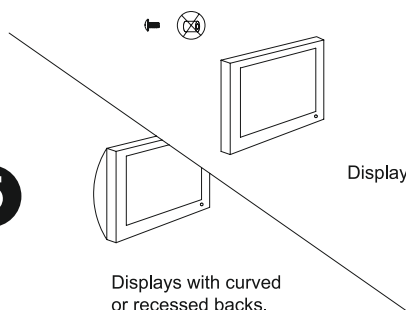

Displays with flat backs.


Displays with curved or recessed backs.



M4 or M5x30 Bolts (D or G) / Spacers (E)




6

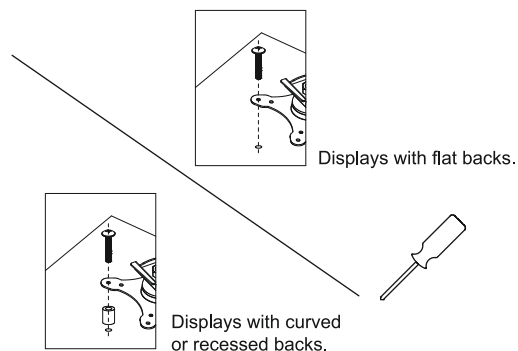


Displays with flat backs.

Displays with curved or recessed backs.




8

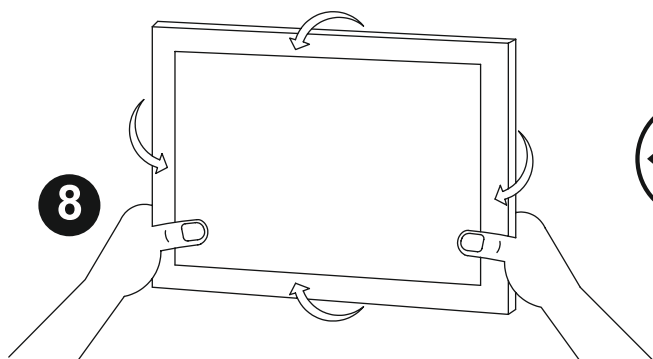

- Adjust the hexagon nut located directly behind the head of the mount using a proper wrench.
- To adjust the tilt angle or rotate your screen, firmly grasp the sides of your display and carefully move it into position.



7

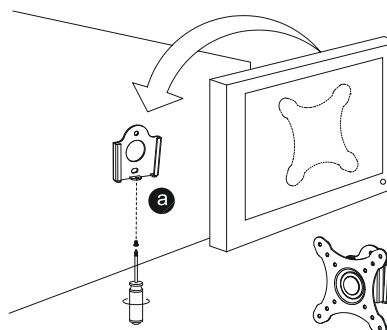

- ^a For additional security, use the M4 x 12 Bolt (C) to hold the two plates together.